



EO WORKBOATS

Alunautic Landing craft 8.0—twin outboard hybrid.

Brand: Fibreshark

Model: V hull—8.00 m. Landingcraft

Building year: 2020

Crew transport—coastal control

Approval: Standard with CE-C

Ø Lloyds register on hull and drawing

Ø MCA 280 MGM—60 nm

SPECIFICATIONS:

Hull material: Marine grade aluminium

Wide landing door—high protected bulwark, with entrance opening on both side. Large steering console with leaning post and for storage space. Large t-top with canvas cover.

Heavy duty deck with two hatches for store space below deck.

Dimensions:

Length: l.o.a.: 8.0 m

Beam o.a.: 3.10 m

Dept: 0.80 m

Loading : 1.500 Kg

Capacity : 2 crew + 12 persons

Fuel: 2 x 500 L

Performance:

Max speed: Approx 40Knots (with twin 225hp)

E-mode Approx 6 Knots (with twin 10Kw)

Propulsion system:

Engines: Twin Mercury Seapro 225 HP plus twin 10 Kw Torqueedo with lithium pack Fixed Propeller

Auxiliary equipment:

Basic E-system with 2 batteries and battery switches. Electric system 12Vdc and 220 V ac— shore power plus twin high power fastchargers.

20 Kwh @48 volt lithium batterij pack for electrical engines.

Hydraulic steering, hydraulic—electric ramp cylinders.

Deck layout:

Deck: Anti slide

Safety railing—optional bimini cover—bollards

Mast with navigation lighting, antenna, radar

Ø Nautical and communication equipment:

echo sounder, GPS, Radar, AIS.

Raymarine VHF Radio 2 x plus handheld VHF radio.

MF/HF radio.

Navtex receiver,

SART transponder, GMDSS approved

EPIRB. GMDSS approved

Ø Various:

Search light roof unit with remote control.

Electrical anchor winch with anchor, chain and line


Fire extinguishers.

Ø= optional



EO WORKBOATS

Alunautic Landing craft 8.0—twin outboard hybrid.

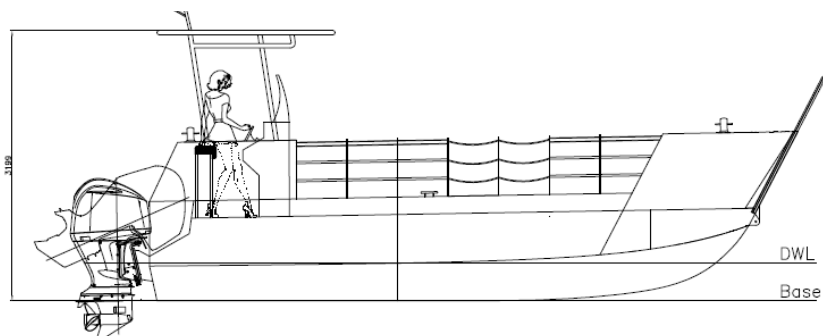

Layout view

